


PD-520 PAIRED MEASURING GUIDE & ORDER FORM




1150 S. 48TH STREET, GRAND FORKS, ND 58201
Phone: 701.746.4519 | **Toll Free:** 877.446.1519
Website: psfloodbarriers.com
Email: 4psinfo@psindustries.com

SWING DIRECTION:


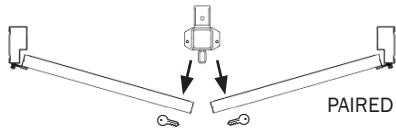


= Keyed Side of Door

VISION LITE OPTIONS:

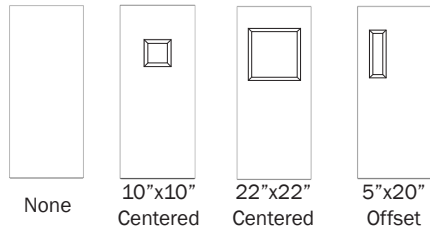

(Viewable Opening Size Shown)

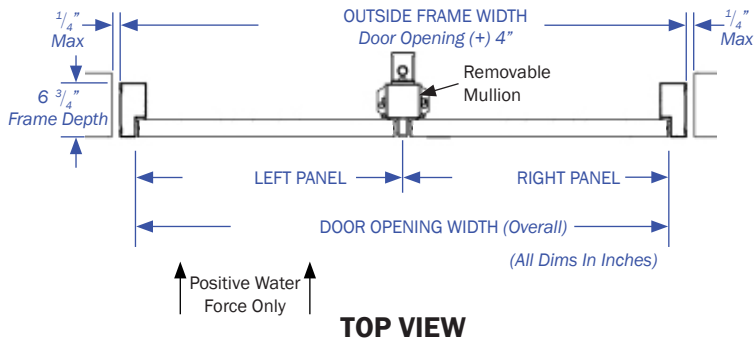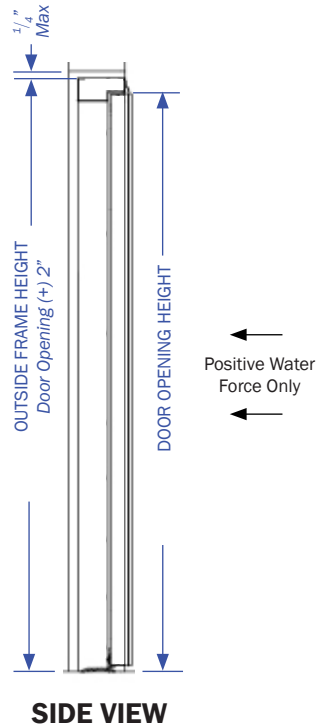

SOLD/QUOTE TO:

NAME: _____
 COMPANY: _____
 ADDRESS: _____
 CITY, STATE, ZIP: _____
 PHONE: _____ FAX: _____
 EMAIL: _____

PROJECT INFO:

PROJECT NAME: _____
 OPENING NAME: _____ QUANTITY: _____
 WATER PROTECTION HEIGHT: (inches) _____ LOADING REQUIRED: _____
 HYDRODYNAMIC: (FPS) _____ (PSF) _____ IMPACT: (LBS) " X "
 LEFT PANEL OPENING WIDTH: (inches) _____ RIGHT PANEL OPENING WIDTH: (inches) _____
 DOOR OPENING WIDTH: (OVERALL) (inches) _____ DOOR OPENING HEIGHT: (inches) _____

PAIRED ACTIVE PANEL(S):	LATCHING HARDWARE:	CLOSER:
LEFT PANEL	PANIC HARDWARE:	ACTIVE PANEL(S) (INCLUDED)
RIGHT PANEL	EXTERIOR TRIM:	
BOTH PANELS		

VISION LITES:	VISION LITE LOCATION:	MOUNTING SURFACE:
10" x 10"	LEFT PANEL	CIP
22" x 22"	RIGHT PANEL	CMU (WALL THICKNESS GROUT-FILLED) IN INCHES
5" x 20"	BOTH PANELS	STRUCTURAL STEEL

DOOR/FRAME MATERIAL:	THRESHOLD TYPE:	
MILD STEEL (STANDARD)	No. 2b (MILL FINISH)	1/2" ADA (STANDARD)
316 STAINLESS STEEL	No. 4 (BRUSHED FINISH)	1 1/4" RAISED (Required with WPH greater than 120")
	No. 6 (POLISHED FINISH)	

TOP COAT PAINT COLOR: (SHERWIN-WILLIAMS INDUSTRIAL ENAMEL) S/W# _____ COLOR: _____ sherwin-williams.com

STAMPED CALCULATIONS REQUESTED:			FM LABEL REQUESTED:	
YES	STATE	NO	YES	NO
(Registered professional engineer stamped calculations from within the state or territory the building will be constructed or substantially improved.)			(Available on Specific Product Configuration, Consult PS Industries for Details; Maximum WPH of 36".)	