


PD-520 SINGLE MEASURING GUIDE & ORDER FORM




1150 S. 48TH STREET, GRAND FORKS, ND 58201
Phone: 701.746.4519 | **Toll Free:** 877.446.1519
Website: psfloodbarriers.com
Email: 4psinfo@psindustries.com

SWING DIRECTION:




☞ = Keyed Side of Door

VISION LITE OPTIONS:

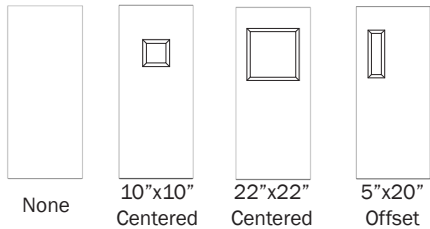


(Viewable Opening Size Shown)

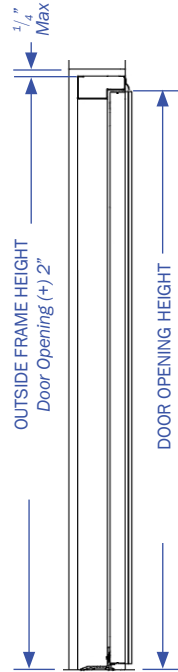

← Positive Water Force Only ←

SIDE VIEW

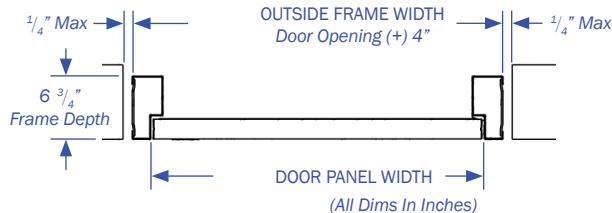

↑ Positive Water Force Only ↑

TOP VIEW

SOLD/QUOTE TO:	
NAME:	
COMPANY:	
ADDRESS:	
CITY, STATE, ZIP:	
PHONE:	FAX:
EMAIL:	

PROJECT INFO:			
PROJECT NAME:			
OPENING NAME:		QUANTITY:	
WATER PROTECTION HEIGHT:	(inches)	LOADING REQUIRED:	
HYDRODYNAMIC:	(FPS) (PSF)	IMPACT:	(LBS) " X "
DOOR OPENING WIDTH:	(inches)	DOOR OPENING HEIGHT:	(inches)

ACTIVE PANEL:	LATCHING HARDWARE:	VISION LITE:
LEFT PANEL	PANIC HARDWARE:	10"x 10"
RIGHT PANEL	EXTERIOR TRIM:	22"x 22"
CLOSER (INCLUDED)		5"x 20"

MOUNTING SURFACE:		
CIP	CMU (GROUT-FILLED)	STRUCTURAL STEEL (WALL THICKNESS IN INCHES)

DOOR/FRAME MATERIAL:	THRESHOLD TYPE:	
MILD STEEL (STANDARD)	No. 2b (MILL FINISH)	1/2" ADA (STANDARD)
	No. 4 (BRUSHED FINISH)	
316 STAINLESS STEEL	No. 6 (POLISHED FINISH)	1 1/4" RAISED (Required with WPH greater than 120")

TOP COAT PAINT COLOR: (SHERWIN-WILLIAMS INDUSTRIAL ENAMEL)	S/W#	COLOR:	sherwin-williams.com
--	------	--------	--

STAMPED CALCULATIONS REQUESTED:			FM LABEL REQUESTED:	
YES	STATE	NO	YES	NO
<small>(Registered professional engineer stamped calculations from within the state or territory the building will be constructed or substantially improved.)</small>			<small>(Available on Specific Product Configuration, Consult PS Industries for Details; Maximum WPH of 36".)</small>	