


PD-522 PAIRED MEASURING GUIDE & ORDER FORM




1150 S. 48TH STREET, GRAND FORKS, ND 58201
Phone: 701.746.4519 | **Toll Free:** 877.446.1519
Website: psfloodbarriers.com
Email: 4psinfo@psindustries.com

SWING DIRECTION:

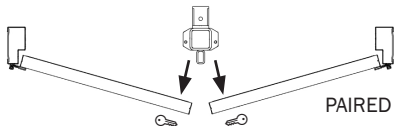


= Keyed Side of Door


VISION LITE OPTIONS:



(Viewable Opening Size Shown)

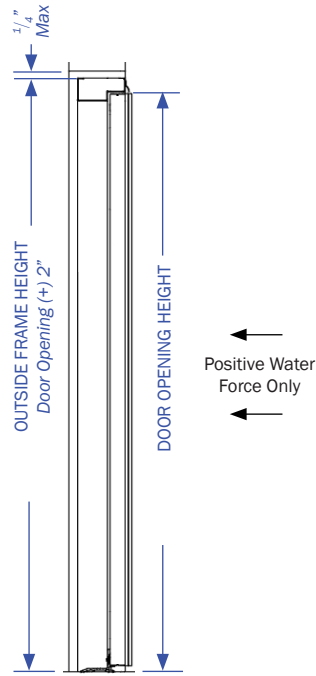

SIDE VIEW

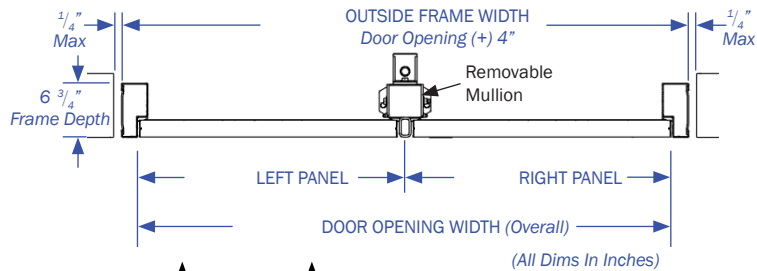

TOP VIEW

SOLD/QUOTE TO:

NAME:	
COMPANY:	
ADDRESS:	
CITY, STATE, ZIP:	
PHONE:	FAX:
EMAIL:	

PROJECT INFO:

PROJECT NAME:	
OPENING NAME:	QUANTITY:
WATER PROTECTION HEIGHT: (inches)	LOADING REQUIRED:
HYDRODYNAMIC: (FPS) (PSF)	IMPACT: (LBS) " X "
LEFT PANEL OPENING WIDTH: (inches)	RIGHT PANEL OPENING WIDTH: (inches)
DOOR OPENING WIDTH: (OVERALL) (inches)	DOOR OPENING HEIGHT: (inches)

PAIRED ACTIVE PANEL(S):	LATCHING HARDWARE:	CLOSER:
LEFT PANEL	PANIC HARDWARE:	ACTIVE PANEL(S) (INCLUDED)
RIGHT PANEL	EXTERIOR TRIM:	
BOTH PANELS		

VISION LITES:	VISION LITE LOCATION:	MOUNTING SURFACE:
10"x 10"	LEFT PANEL	CIP
5"x 20"	RIGHT PANEL	CMU (WALL THICKNESS IN INCHES) (GROUT-FILLED)
	BOTH PANELS	STRUCTURAL STEEL

DOOR/FRAME MATERIAL:	THRESHOLD TYPE:	
MILD STEEL (STANDARD)	No. 2b (MILL FINISH)	1/2" ADA (STANDARD)
316 STAINLESS STEEL	No. 4 (BRUSHED FINISH)	1 1/4" RAISED (Required with WPH greater than 96")
	No. 6 (POLISHED FINISH)	

TOP COAT PAINT COLOR: (SHERWIN-WILLIAMS INDUSTRIAL ENAMEL)	S/W#	COLOR:	sherwin-williams.com
--	------	--------	--

STAMPED CALCULATIONS REQUESTED:			FM LABEL REQUESTED:	
YES	STATE	NO	YES	NO
<small>(Registered professional engineer stamped calculations from within the state or territory the building will be constructed or substantially improved.)</small>			<small>(Available on Specific Product Configuration, Consult PS Industries for Details; Maximum WPH of 36".)</small>	