


STANDARD PD-520 MEASURING GUIDE & ORDER FORM




Toll Free 877-446-1519
 Phone: 701-746-4519
 Fax 701-746-8340
 Website: www.pdoors.com

SWING DIRECTION GUIDE

LHR






RHR



= Keyed Side of Door

Available Vision Lite Locations

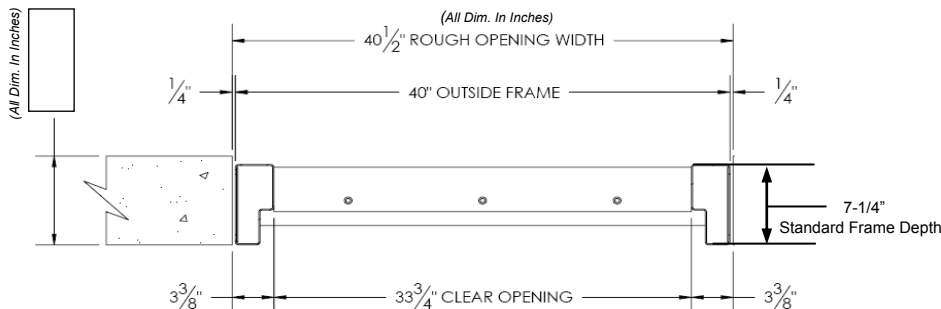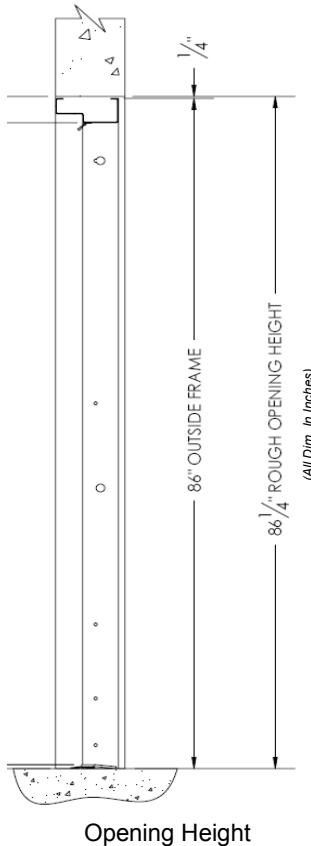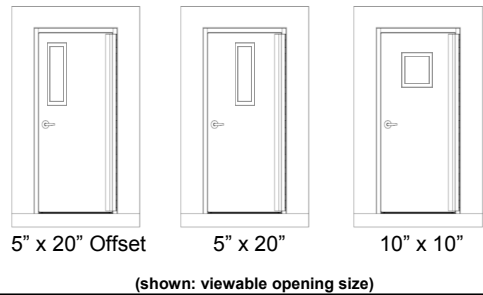

QUOTATION REQUESTED PD-520 ORDER (FM RATED)

SOLD/QUOTE TO:

Name: _____
 Company: _____
 Address: _____
 City, State, Zip: _____
 Phone: _____ Fax: _____
 E-Mail: _____

SHIP TO:

Name: _____	Date: _____
Address: _____	P.O. #: _____
City, State, Zip: _____	TAG: _____
Phone: _____	SHIP VIA: _____

PROJECT NAME: _____

QUANTITY R.O. WIDTH 40-1/2" R.O. HEIGHT: 86-1/4" (All Dim. in Inches)

WATER PROTECTION HEIGHT REQUIRED: 36" MAX (AFF)

MOUNTING SURFACE <input type="checkbox"/> CMU <input type="checkbox"/> CIP <input type="text"/> (Wall Thickness)	SWING DIRECTION <input type="checkbox"/> LHR <input type="checkbox"/> RHR	DOOR/FRAME MATERIAL <input checked="" type="checkbox"/> MILD STEEL
		SIL <input checked="" type="checkbox"/> LOW SILL 1/2"
LATCHING HARDWARE <input checked="" type="checkbox"/> VON DUPRIN(98 SERIES)	VISION LITES (viewable opening) <input type="checkbox"/> 10" x 10" <input type="checkbox"/> 5" x 20"	VISION LITE LOCATION <input type="checkbox"/> 10" x 10" Center <input type="checkbox"/> 5" x 20" Offset <input type="checkbox"/> 5" x 20" Center
DOOR CLOSER <input type="checkbox"/> LCN 4111 (OPTIONAL)	<input checked="" type="checkbox"/> First Coat Finish Option Sherwin-Williams Industrial Enamel Color Code: <input type="text"/> S/W # SW 4026 SLATE GRAY	

FM LABEL REQUESTED: YES NO

(Available on Specific Product Configuration, Consult PS DOORS For Details)

Notes: _____